

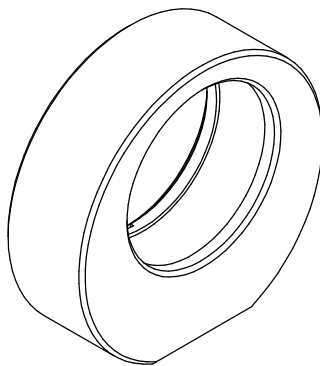
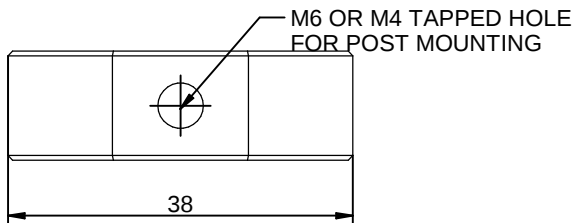
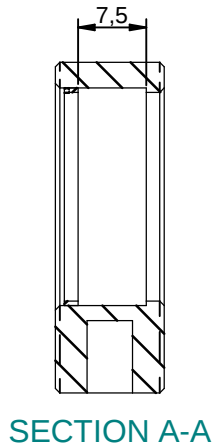


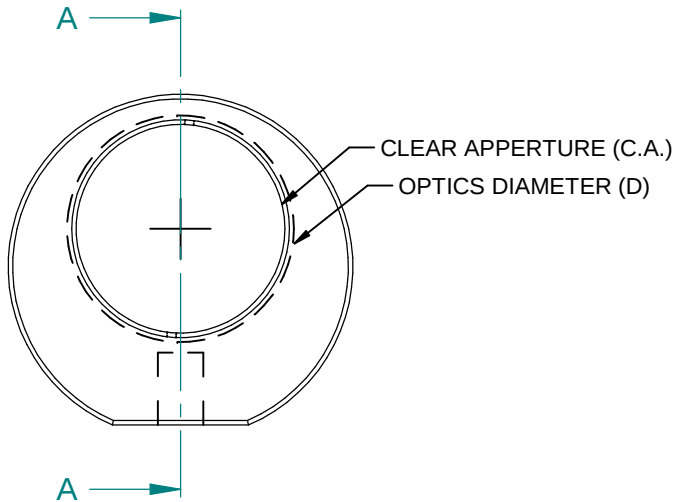


RIGID LENS PRODUCT MATRIX			
OPTICS DIAMETER (D)	CLEAR APPERTURE (C.A)	OUTER DIAMETER (O.D)	Optics Thickness (T)
12.50	10.50	24	5
25.4	23	38	5
38	36	50	5
50.8	47	65	5
75	72	90	5

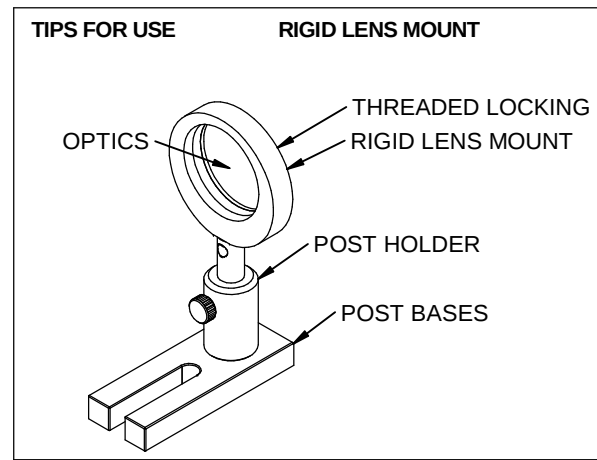

SPECIFICATIONS
Material : Aluminium Alloy.
Finish : Black Anodised matte finish.
Dimensions : As per the product matrix .
Tapping : M6 or M4 Threaded hole
Center Height : 100 approx
at bottam for post mounting.

BILL OF MATERIAL		
S. No.	PRODUCT	QTY (Nos.)
1	RIGID LENS MOUNT	1
2	POST (P-12-30 M6/M6)	1
3	POST HOLDER (PH-12-30)	1
4	POST BASE	1

NOTE: ALL DIMENSIONS ARE IN mm.

LINEAR DIMENSIONS	0.5-3	3-6	6-30	30-120	120-315	315-1000	SURFACE FINISH ALL OVER		1.6 ✓
DEVIATIONS IF UNSPECIFIED	±0.1	±0.1	±0.2	±0.3	±0.5	±0.6	ISSUE		
MATL :AL- Alloy							Est. wt		
DRN : R.P.				DATE:- 26/12/2017		USED ON			
CHK : A.M.									
TITLE :RIGID LEN MOUNT (SPHERICAL LENS MOUNT)							DWG. NO.		
							SHEET 1 OF 1		
LAMBDA OPTIFAB							G-3D POLOGROUND INDUSTRIAL ESTATE, INDORE		