

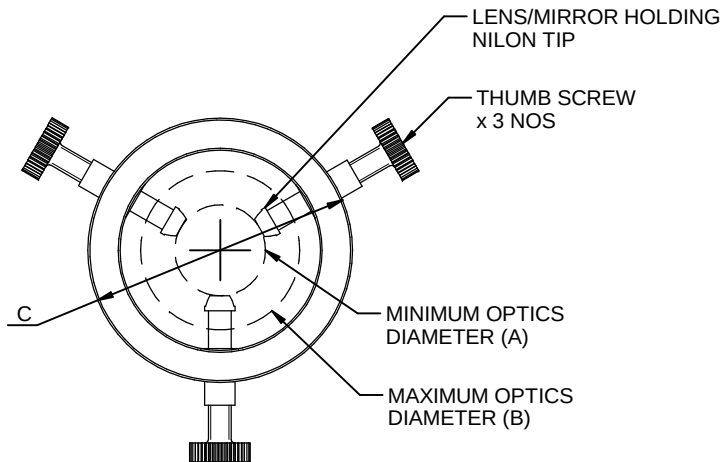
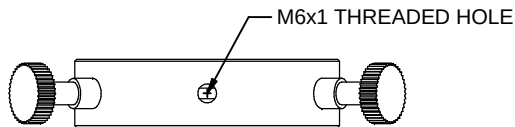


RELATED PRODUCT

PRODUCT-I



PRODUCT-II



SPECIFICATIONS:

CONSTRUCTION:
FINISH:


ALUMINIUM ALLOY (AL-6061).
BLACK ANODIZED

NOTE:

- (1) ALL DIMENSIONS ARE IN mm.
- (2) DIMENSIONS MAY BE REVISED AS PER REQUIRMENT/DESIGN.
- (3) ALL ACCESSORIES SHOWN ARE FOR DEMONSTRATION PURPOSE ONLY AND SHALL NOT BE SUPPLIED WITH ITEM.

SCALE: 1:1

SPECIFICATIONS OF PART FAMILY					
S.NO.	MODEL NO.	OUTER DIAMETER (C)	MINIMUM OPTICS DIAMETER (A)	MAXIMUM OPTICS DIAMETER (B)	THICKNESS (T)
1	ALM-45-20-12-M6	65	20	45	12
2	ALM-65-40-25-M6	85	40	65	25
3	ALM-85-60-30-M6	105	60	85	30

LINEAR DIMENSIONS	0.5-3	3-6	6-30	30-120	120-315	315-1000	SURFACE FINISH ALL OVER		1/6
DEVIATIONS IF UNSPECIFIED	±0.1	±0.1	±0.2	±0.3	±0.5	±0.6	ISSUE	AMENDMENTS	
MATL : STANDARD							QUANTITY:		
DRN : R.P.					DATE:- 20/01/2018		MODEL NO:		
CHK : A.M.							ALM-45-20-12-M6		
TITLE : ADJUSTABLE LENS MOUNT							DWG. NO. 1801001/21		
							SHEET 1 OF 1		
LAMBDA OPTIFAB							G3-D POLOGROUND INDUSTRIAL ESTATE, INDORE		