



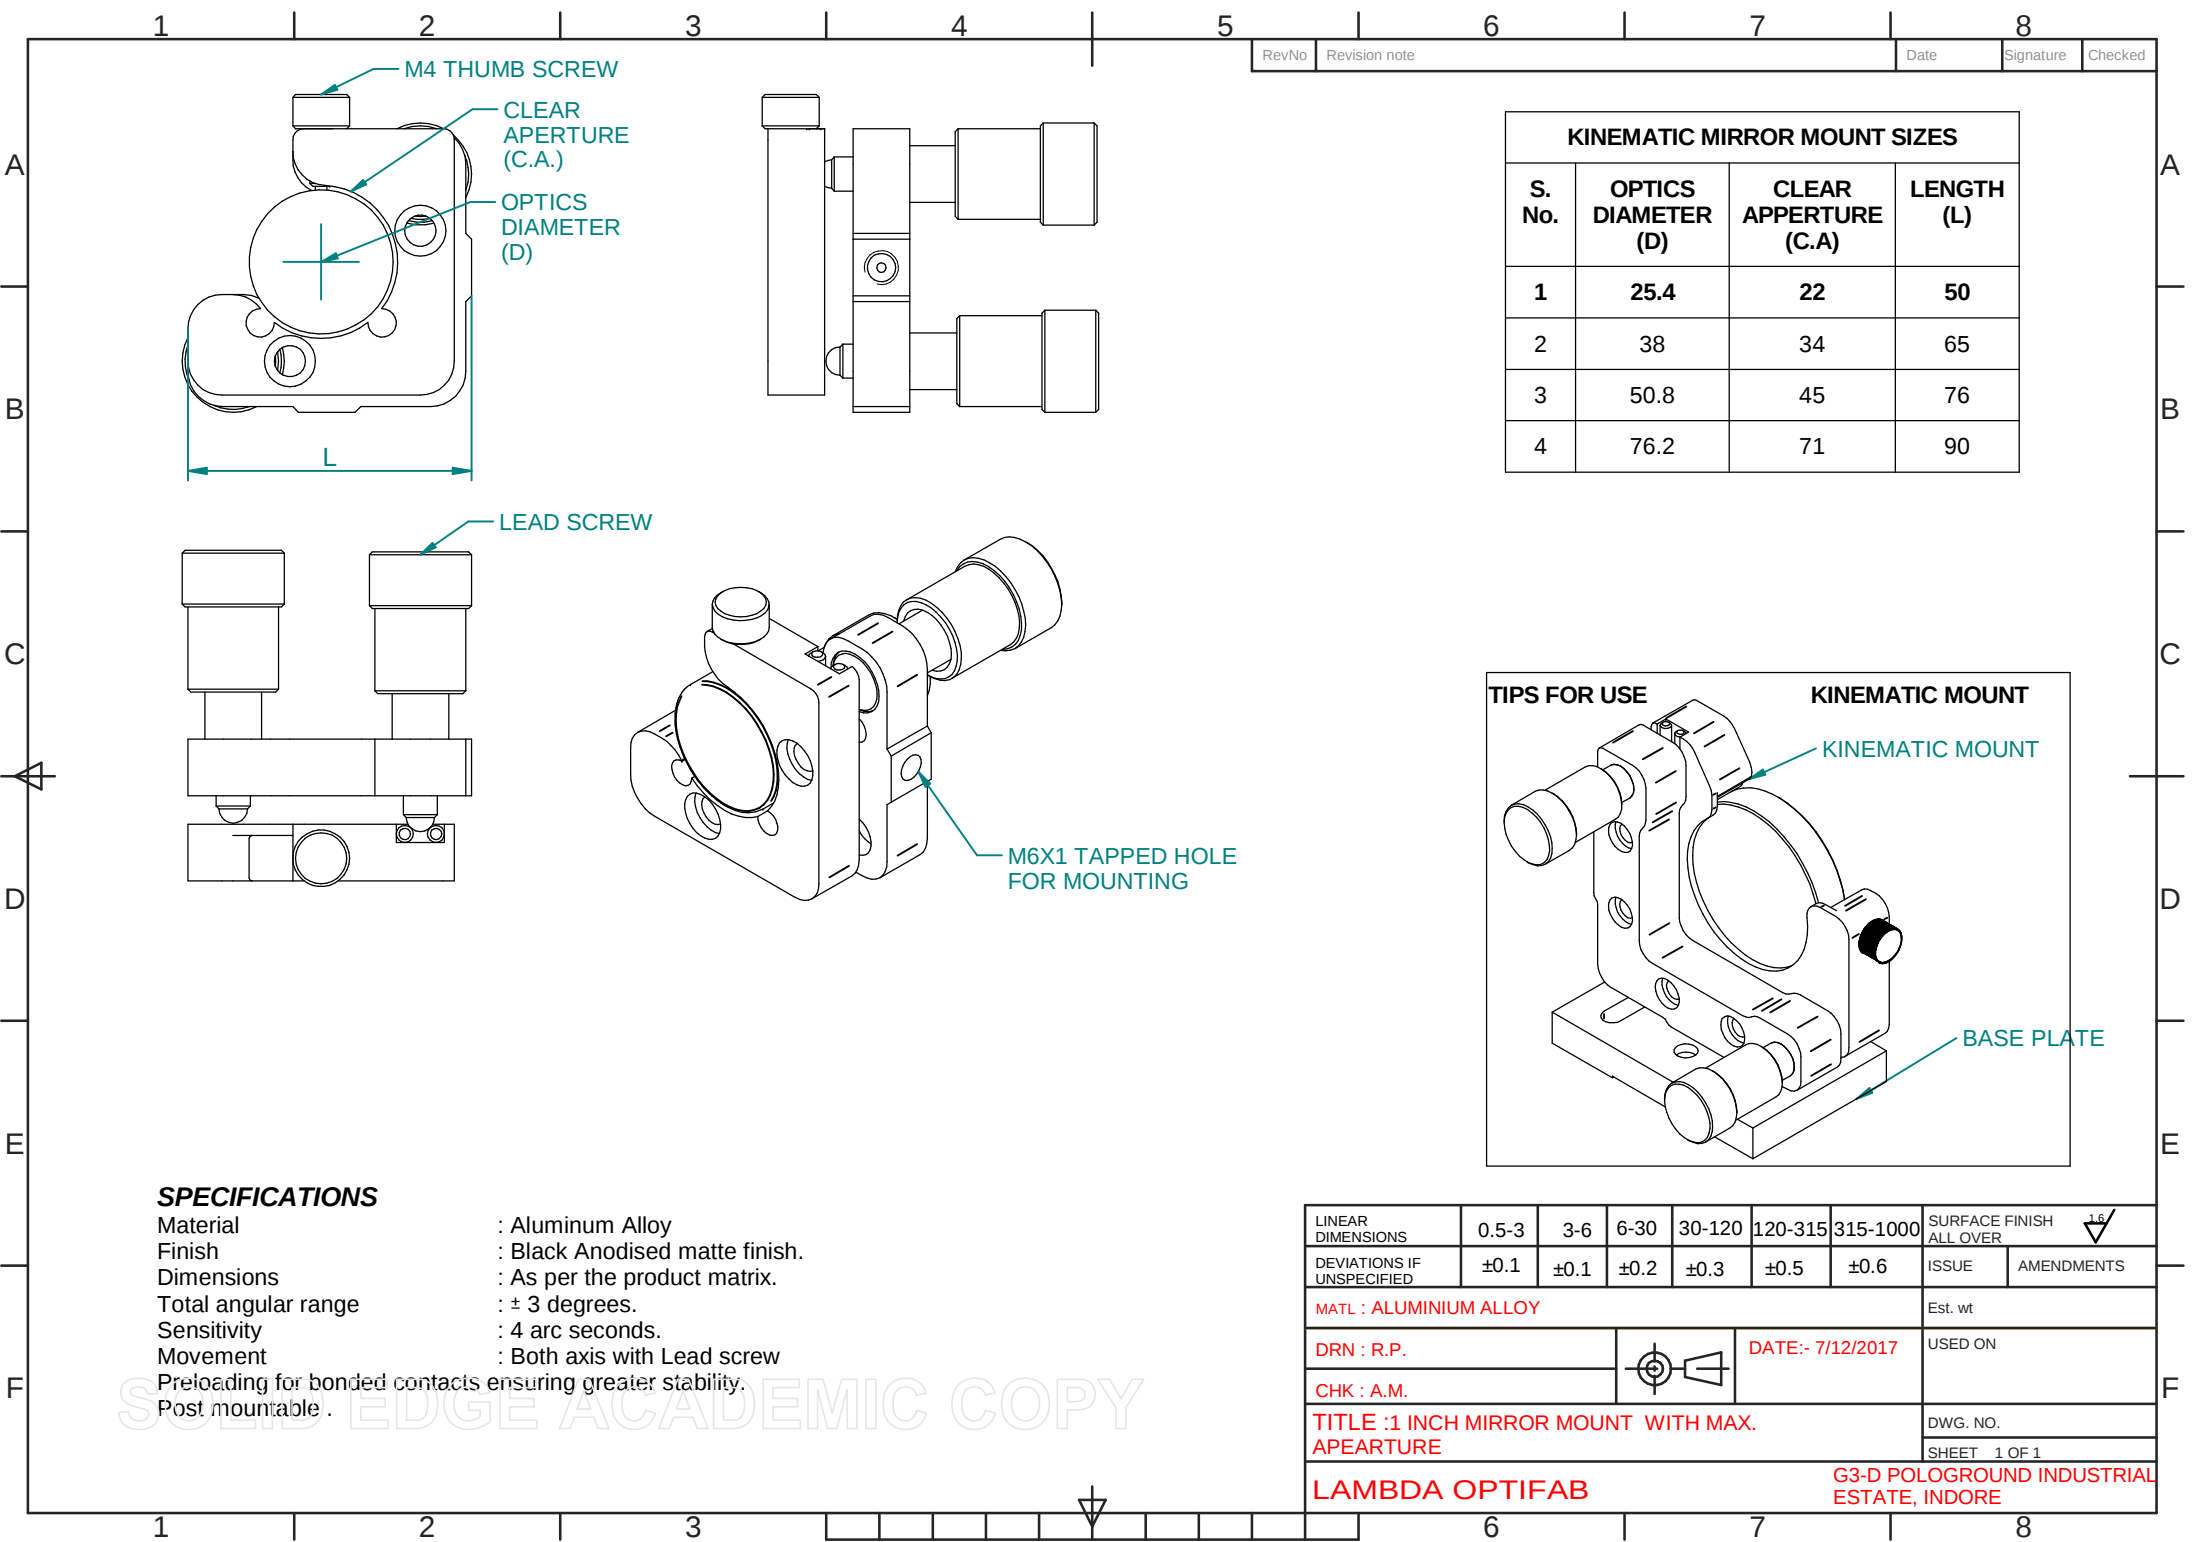

KINEMATIC MIRROR MOUNT SIZES			
S. No.	OPTICS DIAMETER (D)	CLEAR APERTURE (C.A)	LENGTH (L)
1	25.4	22	50
2	38	34	65
3	50.8	45	76
4	76.2	71	90

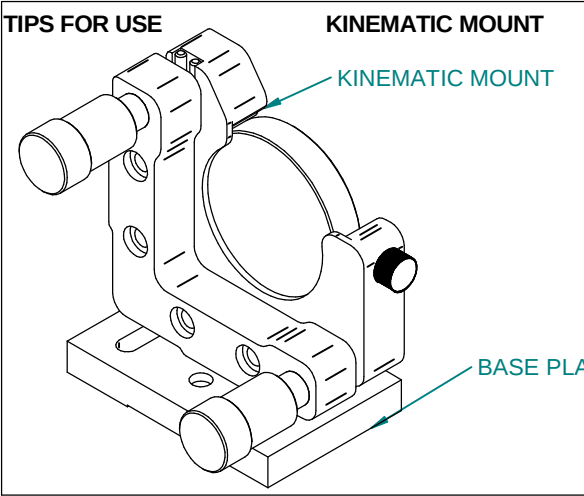

SPECIFICATIONS

Material : Aluminum Alloy
Finish : Black Anodised matte finish.
Dimensions : As per the product matrix.
Total angular range : ± 3 degrees.
Sensitivity : 4 arc seconds.
Movement : Both axis with Lead screw
Preloading for bonded contacts ensuring greater stability.
Post mountable .

LINEAR DIMENSIONS	0.5-3	3-6	6-30	30-120	120-315	315-1000	SURFACE FINISH ALL OVER		
DEVIATIONS IF UNSPECIFIED	±0.1	±0.1	±0.2	±0.3	±0.5	±0.6	ISSUE	AMENDMENTS	
MATL : ALUMINIUM ALLOY							Est. wt		
DRN : R.P.				DATE:- 7/12/2017			USED ON		
CHK : A.M.									
TITLE :1 INCH MIRROR MOUNT WITH MAX. APEARTURE							DWG. NO.		
							SHEET 1 OF 1		
LAMBDA OPTIFAB							G3-D POLOGROUND INDUSTRIAL ESTATE, INDORE		