


A  
B  
C  
D  
E  
F

POST HOLDER PRODUCT MATRIX							
D(DIAMETER) 8 MM POST		D(DIAMETER) 12MM POST		D(DIAMETER) 12.7 MM POST		D(DIAMETER) 16 MM POST	
MODEL NO	HEIGHT (H)	MODEL NO	HEIGHT (H)	MODEL NO	HEIGHT (H)	MODEL NO	HEIGHT (H)
PH-8-30	30	PH-12-20	20	PH-12.7-30	30		
PH-8-40	40	PH-12-30	30	PH-12.7-40	40		
PH-8-50	50	PH-12-40	40	PH-12.7-50	50	PH-16-50	50
PH-8-75	75	PH-12-50	50	PH-12.7-75	75	PH-16-75	75
PH-8-100	100	PH-12-75	75	PH-12.7-90	90	PH-16-100	100
		PH-12-100	100	PH-12.7-100	100	PH-16-150	150
		PH-12-150	150			PH-16-200	200
						PH-16-250	250

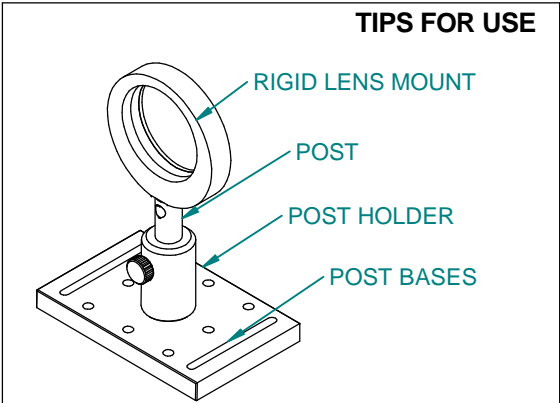


**PRODUCT DETAILS**

The standard post holder provides a simple method of adjusting the height of the accessory mounted on a 8 mm,12mm and 16mm dia mounting post . They are machined to close tolerance to accept the mounting post without any lateral motion.The post is held in position by a spring loaded thumb screw .The post holder has a standard M6x1 mm threading at the base ,which is compatible with various types of base plate,magnetic bases or standard carriers.

**SPECIFICATIONS**

Material :Alluminium Alloy  
Finish :Black Anodized mat finish.  
Dimensions : As per the product matrix.  
Tapping : M6 tapped hole for base mounting .  
D is the diameter of post.  
Spring loaded Thumb screw.

LINEAR DIMENSIONS	0.5-3	3-6	6-30	30-120	120-315	315-1000	SURFACE FINISH ALL OVER		1/6
DEVIATIONS IF UNSPECIFIED	±0.1	±0.1	±0.2	±0.3	±0.5	±0.6	ISSUE	AMENDMENTS	
MATL :ALLUMINIUM ALLOY							Est. wt		
DRN : S.S.				DATE:- 21/7/17		USED ON			
CHK : N.G.									
TITLE : STANDARD POST HOLDER							DWG. NO.2		
							SHEET 2		
LAMBDA OPTIFAB					G-3D POLOGROUND INDUSTRIAL ESTATE, INDORE				

A  
B  
C  
D  
E  
F